


## GENUS 1000




### ACCIAIO

spessore (mm)	peso (Kg/m <sup>2</sup> )	Jxx (cm <sup>4</sup> /m)	Wxx (cm <sup>3</sup> /m)
0,50	4,71	4,81	1,92
0,60	5,65	4,99	2,00
0,80	7,54	6,74	2,70
1,00	9,42	8,40	3,38

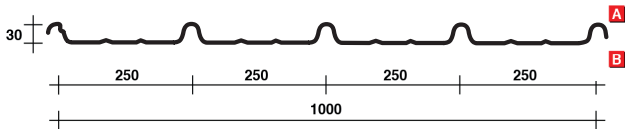

spessore (mm)	interasse cm							
(mm)	60	80	100	120	150	200	225	275
0,50*	670	377	241	167	104	-	-	-
0,60	695	391	250	174	108	-	-	-
0,80	940	529	338	235	146	61	-	-
1,00	1176	661	423	294	182	77	54	-




spessore (mm)	interasse cm							
(mm)	60	80	100	120	150	200	225	275
0,50*	878	494	316	220	141	79	62	-
0,60	911	512	328	228	146	82	65	-
0,80	1232	693	444	308	197	111	88	59
1,00	1542	867	555	385	247	139	110	73


\* La norma CNR 10022/85 sconsiglia l'uso di questo spessore per le coperture.

### ALLUMINIO


spessore (mm)	peso (Kg/m <sup>2</sup> )	Jxx (cm <sup>4</sup> /m)	Wxx (cm <sup>3</sup> /m)
0,60	1,95	4,99	2,00
0,70	2,27	5,79	2,32
0,80	2,59	6,63	2,66
1,00	3,24	8,40	3,38



spessore (mm)	interasse cm				
(mm)	60	80	100	120	150
0,60	171	96	62	-	-
0,70	198	112	71	-	-
0,80	228	128	82	57	-
1,00	289	163	104	72	-



spessore (mm)	interasse cm				
(mm)	60	80	100	120	150
0,60	224	126	81	56	-
0,70		146	94	65	-
0,80	298	168	107	75	-
1,00	379	213	136	95	61



Esempio di sormonto  
1. capillarità  
2. piedino d'appoggio

Nota: freccia  
max =  $f \leq l/150$ .  
1Kg/m<sup>2</sup> 10 N/m<sup>2</sup>