




GENUS 153 POSITIVO

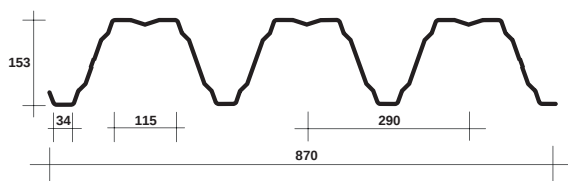

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Winf (cm ³ /m)	Wsup (cm ³ /m)
0,75	10,00	355,93	40,91	54,57
0,88	12,00	425,10	48,39	65,90
1,00	13,00	489,40	55,30	76,50
1,25	17,00	611,85	69,03	95,46
1,50	20,00	734,23	82,73	114,33



spessore	interasse m										
SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	Freccia	
0,75	425	327	234	172	130	100	77	61	-	F 1/200	
	313	215	153	112	83	63	-	-	-	F 1/300	
0,88	507	391	280	206	155	119	93	73	-	F 1/200	
	374	257	183	133	100	75	58	-	-	F 1/300	
1,00	579	450	322	237	179	137	107	84	67	F 1/200	
	430	296	210	154	115	87	67	-	-	F 1/300	
1,25	723	563	403	297	224	172	134	105	83	F 1/200	
	538	370	263	192	144	109	83	65	-	F 1/300	
1,50	867	675	483	356	268	206	160	126	100	F 1/200	
	645	443	316	231	172	131	100	77	-	F 1/300	




spessore	interasse m										
SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	Freccia	
0,75	332	276	234	201	169	130	102	81	65	F 1/200	
							102	81	65	F 1/300	
0,88	423	351	296	253	220	192	169	151	122	F 1/200	
						156	122	97	77	F 1/300	
1,00	511	423	356	304	233	230	202	174	141	F 1/200	
						180	141	112	89	F 1/300	
1,25	695	572	479	385	291	351	306	268	218	F 1/200	
					291	225	176	139	112	F 1/300	
1,50	882	723	603	462	350	439	381	327	261	F 1/200	
					270	211	167	134	100	F 1/300	

Nota:
calcoli effettuati
considerando le
tolleranze UNI
minime sugli
spessori


Nota:
Freccia con
limitazione
F 1/200
F 1/300



GENUS 153 NEGATIVO

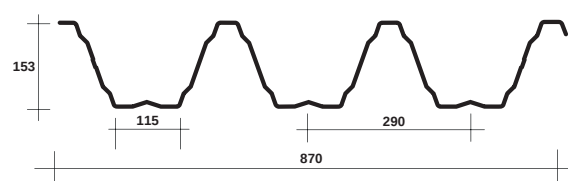

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Winf (cm ³ /m)	Wsup (cm ³ /m)
0,75	10,00	353,58	56,45	39,47
0,88	12,00	422,43	66,76	47,42
1,00	13,00	486,65	76,30	54,87
1,25	17,00	611,85	95,46	69,83
1,50	20,00	734,23	114,33	82,73



spessore	interasse m										
SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	Freccia	
0,75	389	323	232	171	129	99	77	60	-	F 1/200	
	310	213	152	111	83	63	-	-	-	F 1/300	
0,88	497	388	278	205	154	118	92	72	-	F 1/200	
	371	255	181	133	99	75	57	-	-	F 1/300	
1,00	575	447	320	236	178	136	106	84	-	F 1/200	
	428	294	209	153	114	86	66	-	-	F 1/300	
1,25	723	563	403	297	224	172	134	105	83	F 1/200	
	538	370	263	192	144	109	83	65	-	F 1/300	
1,50	867	675	483	356	268	206	160	126	100	F 1/200	
	645	443	316	231	172	131	100	77	-	F 1/300	



spessore	interasse m										
SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	Freccia	
0,75	323	270	229	197	168	151	134	119	101	F 1/200	
						129	101	80	64	F 1/300	
0,88	413	343	290	249	201	189	167	149	121	F 1/200	
						155	121	96	77	F 1/300	
1,00	502	416	351	300	232	230	202	174	141	F 1/200	
						180	141	112	89	F 1/300	
1,25	695	572	479	385	291	306	268	218	176	F 1/200	
					225	176	139	112	89	F 1/300	
1,50	882	723	603	462	350	439	381	327	261	F 1/200	
					270	211	167	134	100	F 1/300	

Nota:
calcoli effettuati
considerando le
tolleranze UNI
minime sugli
spessori

Nota:
Freccia con
limitazione
F 1/200
F 1/300